




1.44KVA Single-Phase

Cab-BS15-JOHE10

User Manual

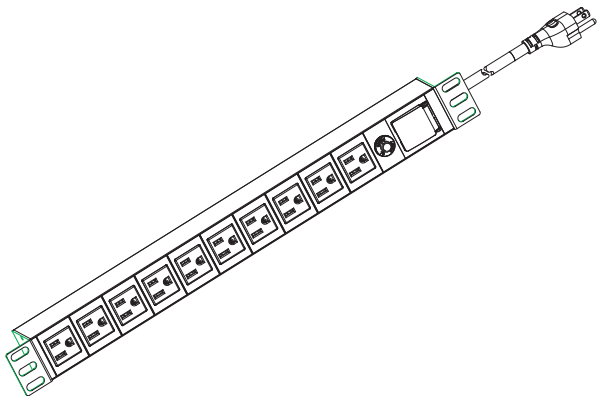

Main Function	Project Content	Specification Parameters
Input Characteristics	Power Supply	Single-phase AC
	Rated Voltage	100-120VAC
	Rated Current	12A
	Frequency	50/60Hz
	Plug	NEMA 5-15P
	Cable Length	1.8M
	Cable Specification	3*14AWG
	Cable Type	SJT
Output characteristics	Voltage	100-120VAC
	Current	12A
	Socket	NEMA 5-15R * 10
	Socket color	Black
	Socket anti-loosening	None
Functional module	Switch	Double break switch with light
	Overload protection	15A overload protector
	Circuit breaker	None
	SPD	None
	Fuse	None
	PD charging port	None
	Junction box	None
	Voltmeter-ammeter	None
	Measuring table	None
	Power indicator	None

Physical characteristics	Product size	487*44*44mm (1U)
	Copper bar cross-sectional area	2.5mm ²
	Copper bar material	T2 purple copper
	Shell material	Aluminum alloy
	Shell color	Black fine sand texture
	Safety protection	Metal shell with internal grounding, internal cavity type insulated Mylar sheet
	Flame retardant grade	UL94V-0
	Temperature	Operating temperature -10℃~60℃; Storage temperature -20℃ ~ 70℃
	Humidity	5%~95%, non-condensing
	Working altitude	0~3000M
	Single piece weight	0.908KG
Standards and compliance	Product certification	cETLus
	Product compliance	RoHS Directive
Packaging	Paperwork included	User manual、Product certificate of conformity
	Accessories included	M6 crown screw + floating nut 4 sets
	Packaging size	535*124*79mm
	Single piece weight	1.088KG