




2.4KVA Single-Phase

Cab-BS10-JOLAG7

User Manual

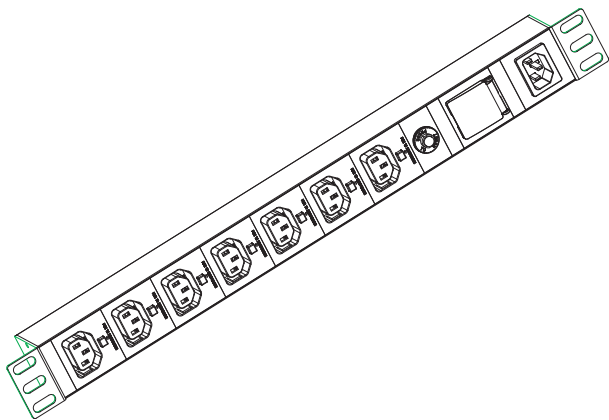

Main Function	Project Content	Specification Parameters
Input Characteristics	Power Supply	Single-phase AC
	Rated Voltage	100-240VAC
	Rated Current	8A
	Frequency	50/60Hz
	Plug	IEC-C14
	Cable Length	/
	Cable Specification	/
	Cable Type	/
Output Characteristics	Voltage	100-240VAC
	Electric current	8A
	Socket	IEC-C13 * 7 pieces
	Socket color	Black
	Socket anti-loosening	Button anti-loosening
Functional module	Switch	Double-break switch with light
	Overload protection	10A overload protector
	Circuit breaker	None
	SPD	None
	Fuse	None
	PD charging port	None
	Junction box	None
	Voltmeter-ammeter	None
	Metering meter	None
	Power indicator light	None

Physical Properties	Product Dimensions	487*44*44mm(1U)
	Copper bar cross-sectional area	2.5mm ²
	Copper bar material	T2 purple copper
	Shell material	Aluminum alloy
	Shell color	Black fine sand texture
	Safety protection	Grounded inside the metal shell, internal cavity insulation Mylarsheet
	Flame retardant grade	UL94V-0
	Temperature	Operating temperature -10℃~60℃ ; Storage temperature-20℃ ~ 70℃
	Humidity	5%~95%, non-condensing
	Operating altitude	0~3000M
	Single piece weight	0.610KG
Standards and Compliance	Product Certification	cETLus
	Product Compliance	RoHS Directive
Packaging	Packing List	User Manual、ProductCertificate of Conformity
	Included Accessories	M6 crown screw + floating nut 4 sets
	Packaging size	535*124*79mm
	Single piece weight	0.790KG