




4.0KVA Single-Phase

Cab-BS16-FTMBG8

User Manual

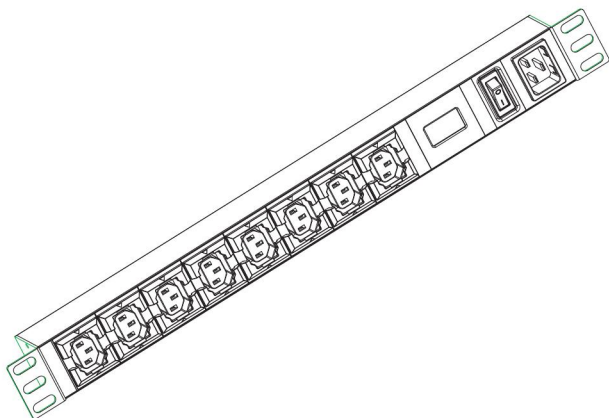

Main Function	Project Content	Specification Parameters
Input Characteristics	Power Supply	Single-phase AC
	Rated Voltage	100-240VAC
	Rated Current	16A
	Frequency	50/60Hz
	Plug	IEC-C20
	Cable Length	/
	Cable Specification	/
	Cable Type	/
Output Characteristics	Voltage	100-240VAC
	Electric current	16A
	Socket	IEC-C13 plug anti-loosening * 8 pcs
	Socket color	Black
	Socket anti-loosening	Plug anti-loosening
Function module	Switch	Single pole switch with indicator light
	Overload protection	None
	Circuit breaker	None
	SPD	None
	Fuse	None
	PD charging port	None
	Junction box	None
	Voltmeter-ammeter	Voltmeter-ammeter
	Meter	None
	Power indicator light	None

Physical characteristics	Product Dimensions	487*44*44mm(1U)
	Copper bar cross-sectional area	2.5mm ²
	Copper bar material	T2 purple copper
	Shell material	Aluminum alloy
	Shell color	Black fine sand texture
	Safety protection	Metal shell internal grounding, internal cavity type insulated Mylar sheet
	Flame retardant grade	UL94V-0
	Temperature	Operating temperature -10℃~60℃ ; Storage temperature-20℃ ~ 70℃
	Humidity	5%~95%, non-condensing
	Operating altitude	0~3000M
	Single piece weight	
Standards and Compliance	Product Certification	CB, CE, CCC, ETL, UL, FCC
	Product Compliance	RoHS Directive
Packaging	Packing List	User Manual、ProductCertificate of Conformity
	Included Accessories	M6 crown screw + floating nut 4 sets
	Packaging dimensions	
	Single piece weight	
Quality Assurance		3-year warranty, guaranteed return