




Model: Cab-M02-23R-BK-PRO
Cab-M02-23R-WH-PRO

Installation guide

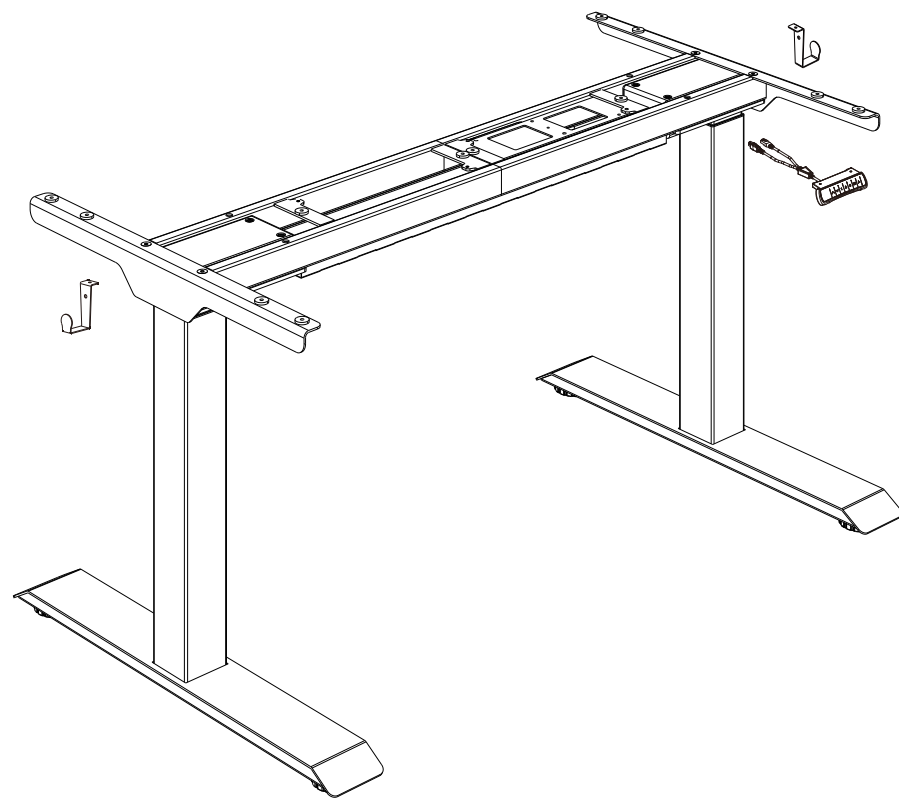

< The pictures below are for reference only, please refer to the actual product. >
Please read this product manual carefully before use, and keep it properly.


Technical Data

Column stage	3
Max. Load Capacity	160KG
Hook Load Capacity	4.5KG
Max. Speed	40mm/s
Lowest Height	580mm
Highest Height	1230mm
Applicable Tabletop Size	Length: 1200mm-2000mm
	Width: 600mm-800mm
	Thickness: ≥16mm

Product List

Accessory List

Note: The line drawings below are for reference only and may differ slightly from the physical product in some cases. Please refer to the actual product for accuracy. If any tools are missing or there are problems with installation, please contact customer service.

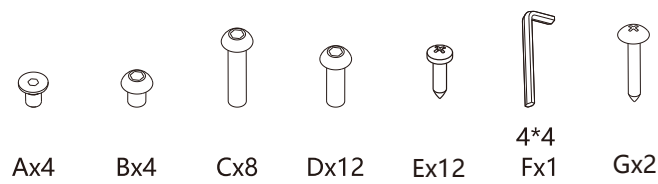


Preparation before installation



Part List

No.	Part	No.	Part
①	Side bracket x2	⑤	Pedestal x2
②	Supporting beam x1	⑥	Adapter x1
③	Baffle x1	⑦	Handset x1
④	Lifting column x2	⑧	AC power cable x1
		⑨	Hooks x2



Installation Instruction

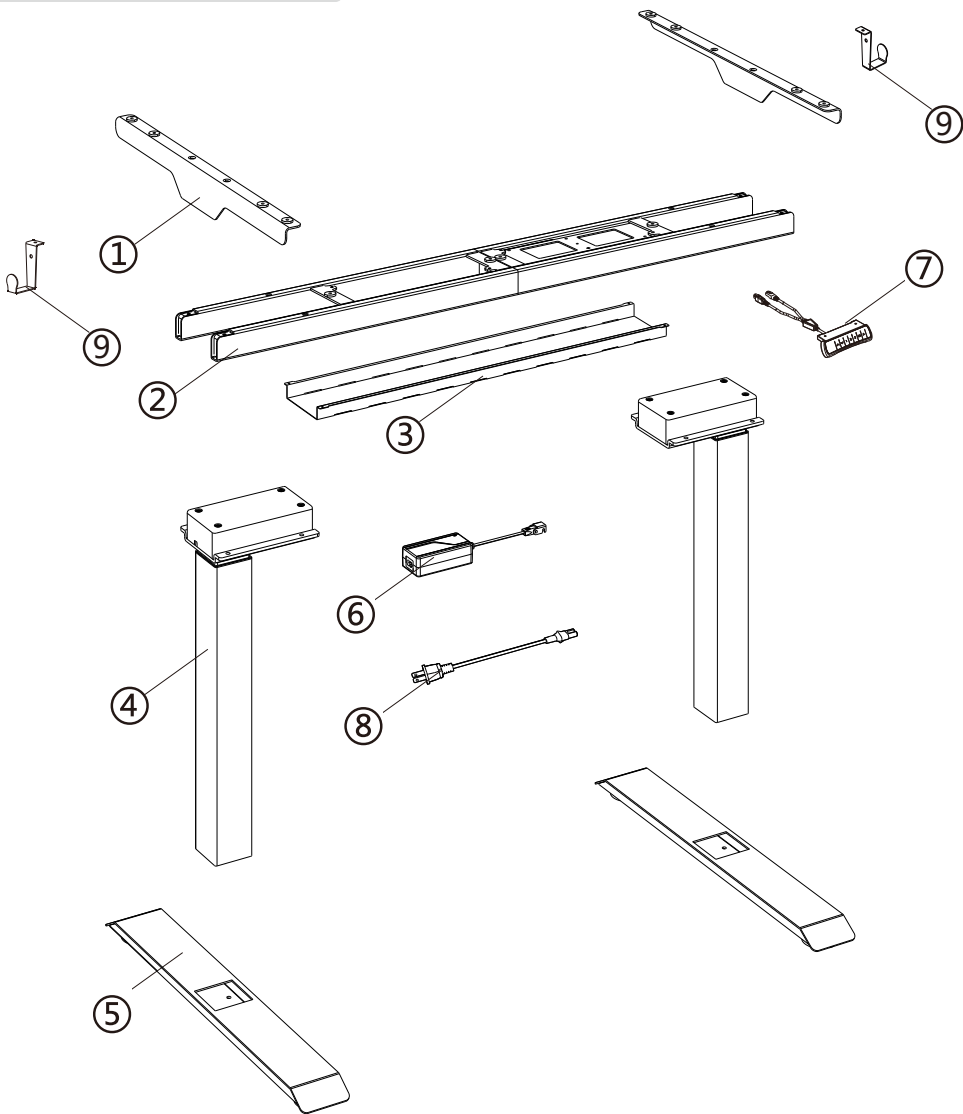

Installation Steps



STEP1

Connect the Bracket and the Support Beam

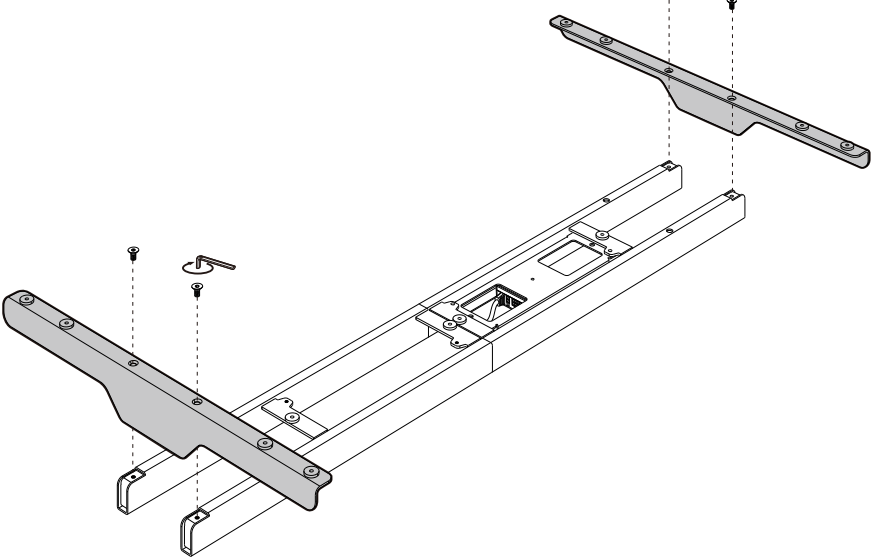

STEP2

Install the columns

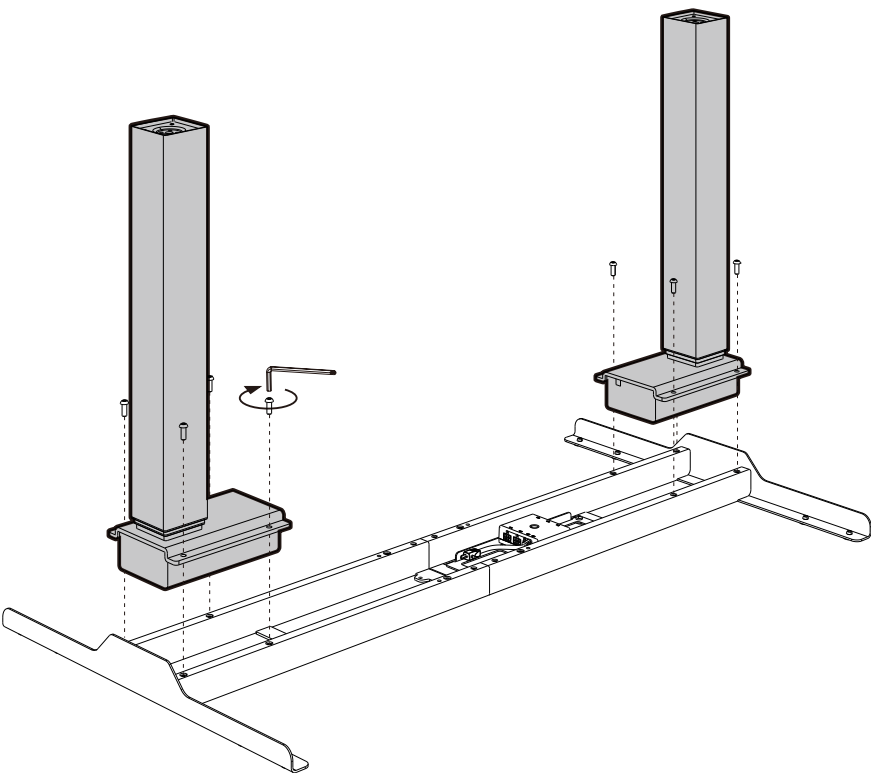

STEP3Install the Pedestal

C x8

F x1
4x4

STEP4Stretch beam

F x1
4x4

Loosen

Adjust

Pre-Tighten

When stretch the crossbeam, please don't exceed this hole position.

! The distance of the telescoping of the supporting crossbeam can be adjusted according to the actual usage situation.

≤200mm

! The distance between the supporting bracket and the edge of the tabletop should not exceed 200mm.

For self-provided tabletops, it is important to ensure suffi strength. The reference value is 160kg, but the actual weight capacity may vary depending on the specific material of the tabletop.

STEP5Install the Tabletop

E x12

F x1
4x4

Self-prepared

The installation sequence for the screws is ● → ■

STEP6Install the handset and hooks

G x2

x2

Self-prepared

STEP7Connect the cables

! Connect to power only after wiring is completed.

1

2

3

Motor cable

Handset Cable

STEP8Install the Baffle

B x4

F x1
4x4

Method 1

1

2

3


4

! Do not fully tighten Screw B; leave a 2-3 mm gap.

Unilateral Snap-in

Tighten

Press-fit the Other Side

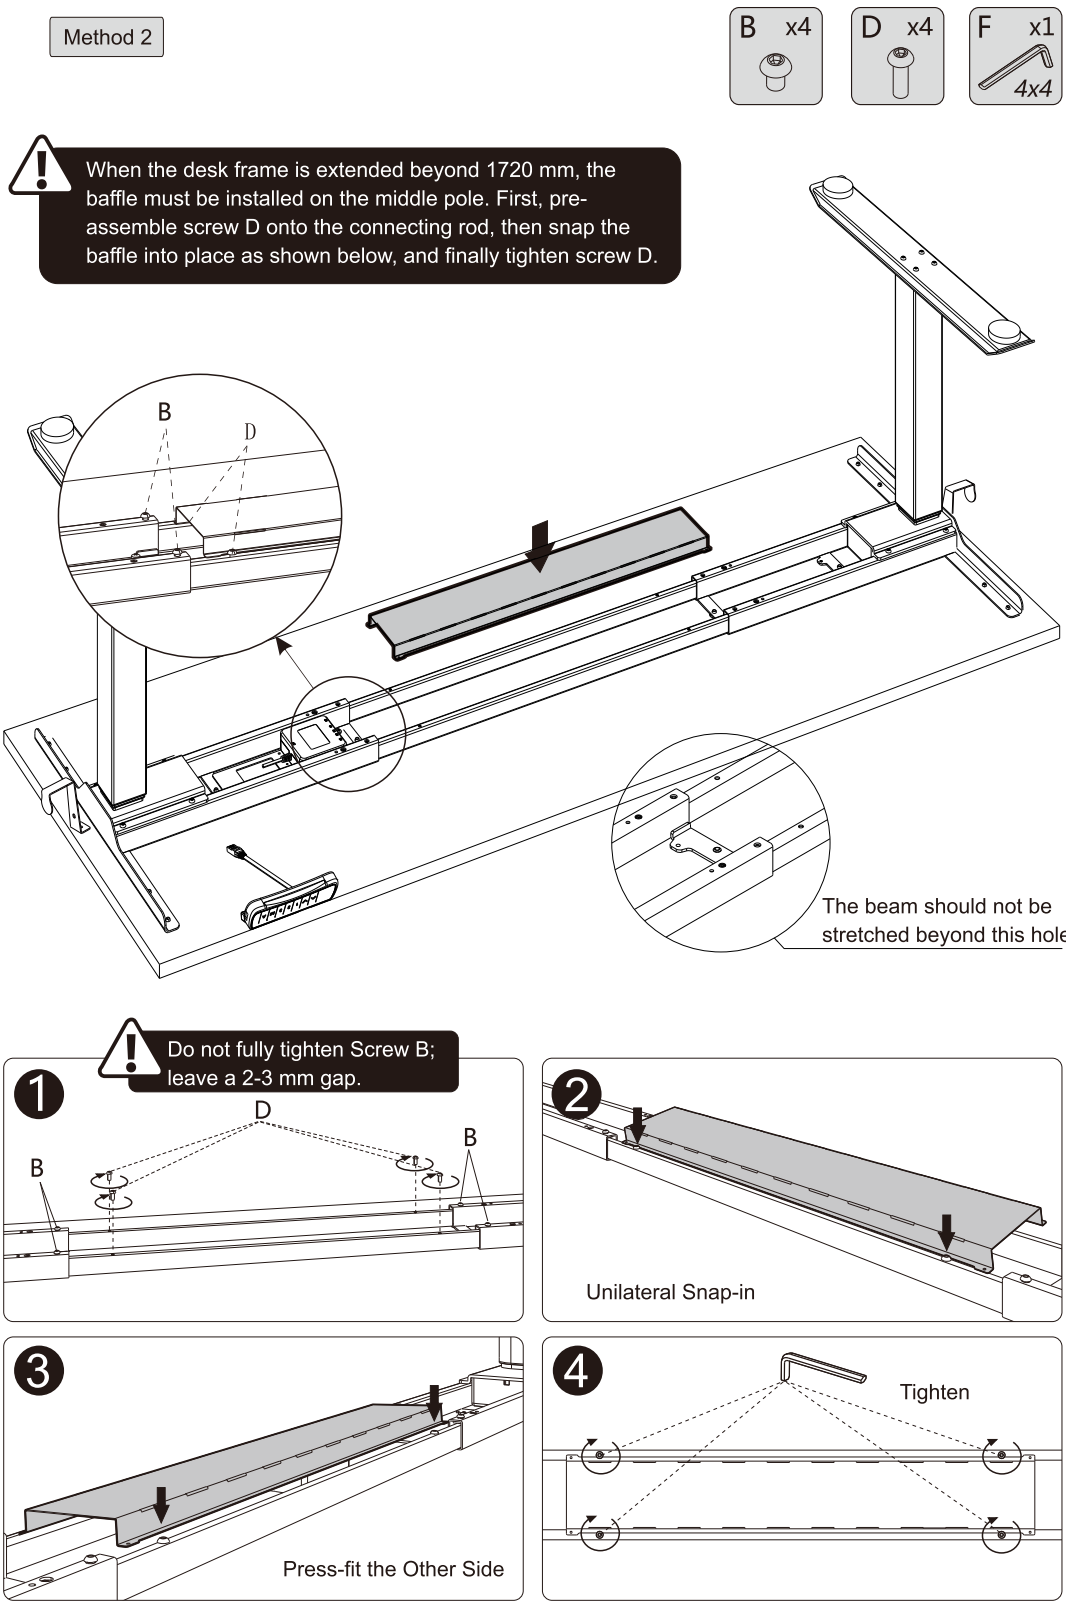



Attention

- 1. Power supply: AC100V~240V, 50/60Hz
- 2. Service Environment: 0-40℃
- 3. Unplug the power plug before cleaning, wipe the dust on surface with slight wet dishcloth when cleaning, be careful not to let the drops into the internal parts, not loose the connector.
- 4. The electric box contains electronic components, metals, plastics, wires etc., so dispose of it in accordance with each country's environmental legislation, not the general household waste.
- 5. Check carefully to ensure correct and complete assembly before using.
- 6. Be familiar with all functions and program settings of the product before first use.
- 7. Children are forbidden to play on the product because of unforeseen action when playing, so any dangerous consequences caused by this improper action will not be on manufacturers.
- 8. Slight noise caused by the V-ribbed belt or brake system due to structure will not have any effect on the use of the equipment.
- 9. Corrosive or abrasive materials are forbidden to clean the equipment. Must ensure that the cleaner used will not pollute the environment.
- 10. This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance.
- 11. Cleaning and user maintenance shall not be made by children without supervision.
- 12. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or a similarly qualified person in order to avoid a hazard.
- 13. Please make sure there is no hazard sources in your operating environment. e.g., do not litter the tools around. Always be careful to treat the packaging materials in order to avoid any possible danger, e.g. plastic bag may lead to choking hazard to children.
- 14. Keep the original package of the equipment if necessary in case of the future use in transportation.

Waste disposal



This marking indicates that this product should not be disposed with other household wastes. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.